


Características técnicas:

Nº de referencia 40353

Revolving Transfer Machine

Marca: PFIFFNER
Modelo: HB 32/16
Año de fabricación: 2019 Machining Centre - Rotary / Line
Reconstruida: 2019
Control: Control CNC SIEMENS

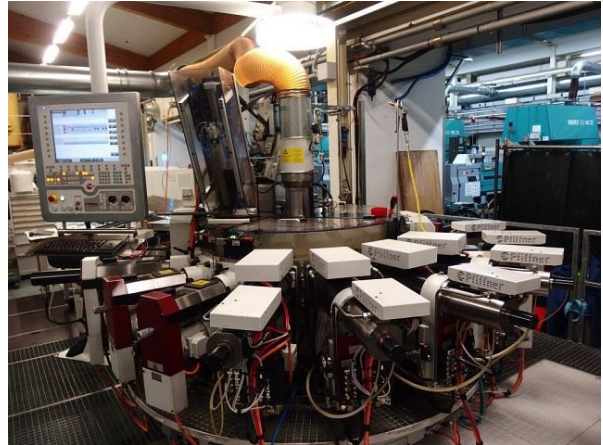

Funciones básicas

Número de cabezales: 16

Zona de trabajo

Diámetro de torneado (máx.): 32 mm

Datos de conexión eléctricos

Tensión de conexión: 400 V
Frecuencia de la red: 50 Hz

Dimensiones / peso

espacio requerido -
izquierdo/derecha-: 9200 mm
espacio requerido -delante/atrás-: 4002 mm
Altura total: 3200 mm

Información adicional:

The plant for sale was completely revised by the manufacturer (2019) and brought up to the state of the art.

The machine could never be used (new condition) due to an order cancellation. Therefore we sell this plant.

Starting material Ø27x3000mm (bar material)

Stations (16 pcs.):


- 1 sawing off with a saw blade Ø250mm
- 2 + 3 feed unit VE 36/100-HSK40; Stroke 100mm, 5430 rpm (IKZ 70bar)
- 4 + 5 feed unit VE 36/100-HSK40; Stroke 100mm, 5430 rpm (IKZ 70bar)
- 6 + 7 CNC compound slide 36/100-HSK40; Stroke X ± 15mm Y ± 30mm
- 8 + 9 CNC turning unit 50/100-PSK; Z-axis 100mm X-axis 20mm (n-max 6`000rpm)
- 10 + 11 CNC turning unit 50/100-PSK; Z-axis 100mm X-axis 20mm (n-max 6`000rpm)
- 12 + 13 feed unit VE 26/80-HSK; Stroke 80mm, 7200 rpm
- 14 VE36 / 100-HSK feed unit; Stroke 100mm 5430 U / min (IKZ)
- 15 + 16 collection unit-rotating, planning, chamfering; CNC compound slide X ± 15mm Y ± 30

Vendedor:


ProdEq Trading GmbH
Michael Weishaupt
Reckholder 1, 9527 Niederhelfenschwil, Switzerland
+41 71 948 70 60
michael.weishaupt@prodeq.ch

Fotos y documentos

Nº de referencia 40353

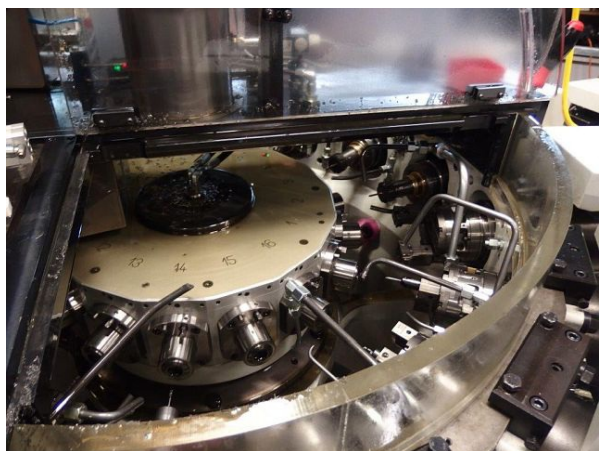

Auslauf

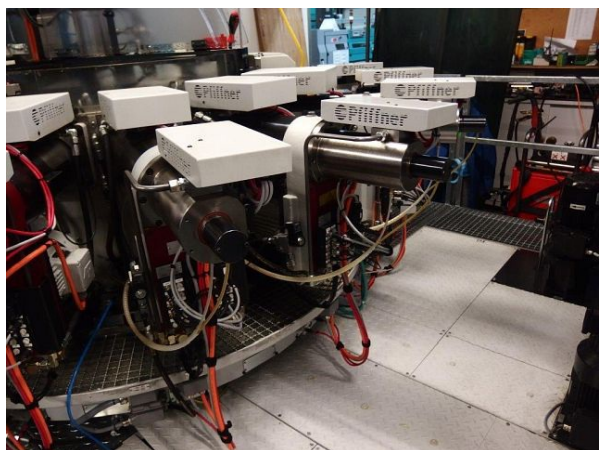

Stangeneinlauf