

## Data Sheet

Reference 42744  
No.:

## Станки для размотки и выпрямления проволоки из катушек

Brand: ARKU  
Model: RM 5035.4/21  
YoM, approx.: 1989 used  
Reconditioned: 2006  
Controls: ПЛК - программируемый логический контроллер SIEMENS S5 115 U



### Overall Specifications (coil lines)

sheet width max.: 350 mm  
sheet thickness max.: 8 mm  
coil weight max.: 4 to  
feed velocity max.: 10 m/min  
feedstock transport direction: left to right

### Decoiler

design: single reel  
sheet width max.: 350 mm  
coil weight max.: 4 to  
max. diameter of coil: 1500 mm  
mandrel expansion range from: 370 mm  
mandrel expansion range up to: 530 mm  
feed velocity max.: 10 m/min

### Leveller Unit

sheet width max.: 350 mm  
sheet thickness max.: 8 mm  
Количество правильных вальцов: 21  
diameter of leveller rolls: 50 mm  
number of infeed-/outfeed rolls: 2  
diameter of feed rolls: 120 mm  
feed velocity max.: 10 m/min

### Данные электр. Подключения

Общая потребляемая мощность: 38 kW  
Напряжение питания: 380 V  
Частота тока в сети: 50 Hz

### Габариты / вес

Общий вес (около): 13000 kg

### Additional Information:

Line consisting of  
+ Uncoiler ARKU AH4000/MSG-4Q  
+ insert attachment ARKU  
+ precision leveller ARKU RM 5035 4/21  
+ band loop ARKU



levelling capacity according to diagram

### Seller:

ProdEq Trading GmbH  
Frank Goedicke  
Reckholder 1, 9527 Niederhelfenschwil, Switzerland  
+41 71 948 70 60  
frank.goedicke@prodeq.ch

### Photos & Documents

Reference No.: 42744

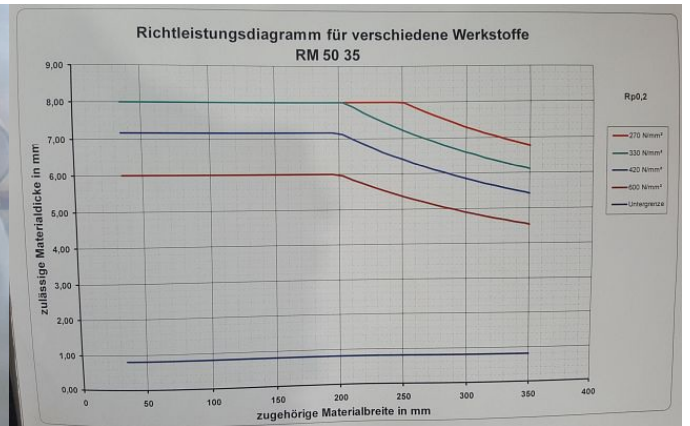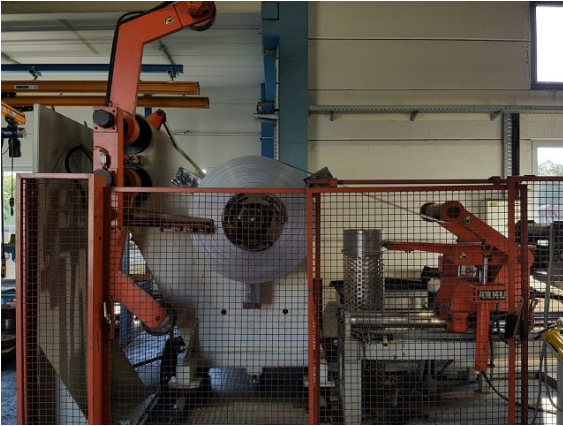

Video Template:

| [https://youtube.com/embed/TJj2vgk\\_b80](https://youtube.com/embed/TJj2vgk_b80) |