


Data Sheet

Reference 43890
No.:

Станки для размотки и выпрямления проволоки из катушек

Brand: ARKU
Model: RM 50X/9 ECOPLAN
YoM, approx.: 2005 used
Reconditioned:
Controls: ПЛК - программируемый логический контроллер

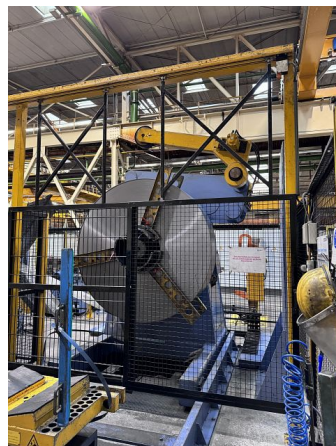

Overall Specifications (coil lines)

sheet width max.: 500 mm
sheet thickness max.: 4 mm
coil weight max.: 10.5 to
feedstock transport direction: right to left

Coil Chair

coil weight max.: 10.5 to
Ход: 750 mm

Decoiler

design: single reel
sheet width max.: 500 mm
sheet width (min): 150 mm
coil weight max.: 10.5 to
max. diameter of coil: 2020 mm
mandrel expansion range from: 470 mm
mandrel expansion range up to: 530 mm
feed velocity max.: 20 m/min

Crop Shear

sheet thickness max.: 4 mm
working width max.: 530 mm
Частота ходов, макс.: 20 /min

Leveller Unit

sheet width max.: 500 mm
sheet width (min): 150 mm
sheet thickness max.: 4 mm
sheet thickness min.: 2 mm
Количество правильных вальцов: 9
diameter of leveller rolls: 56 mm
diameter of feed rolls: 150 mm
feed velocity max.: 20 m/min

Данные электр. Подключения

Общая потребляемая мощность: 30 kW
Напряжение питания: 400 V
Частота тока в сети: 50 Hz

Габариты / вес

Общий вес (около): 17000 kg

Additional Information:

Coil line consisting of:
- Coil loading chair HUBTEX
- ARKU single-sided decoiler
- ARKU RM 5050/9 feed straightening machine, +- 0.1 mm feeding precision
- measuring wheel to verify feed length
- Cut-to-length shear Huttenlocher & Schäfer KSK/S year of construction 2017

Seller:

ProdEq Deutschland GmbH Standort Hückeswagen
Thomas Berger
Weberweg 2, 42499 Hückeswagen, Germany
+49 2192 935 382
thomas.berger@prodeq.de

Photos & Documents

Reference No.: 43890

